

Description :

Toughening agent to improving toughness, flexibility, impact resistance and adhesion for epoxy systems

Though pox C is a reactive VOC free epoxy functional toughening agent designed for use in coatings and adhesives applications to combine flexibility and hardness without negatively impact in other desired properties


Application :

For the formulation of heavy duty epoxy coatings and adhesives based on solid and liquid epoxy resins, with property of crack bridging.

- Industrial coating
- Marine and protective coating
- Chemical and moisture resistance coatings
- Indoor floor coatings
- Adhesives

Packing :

Lid steel drums 200 kg net other packages upon request.

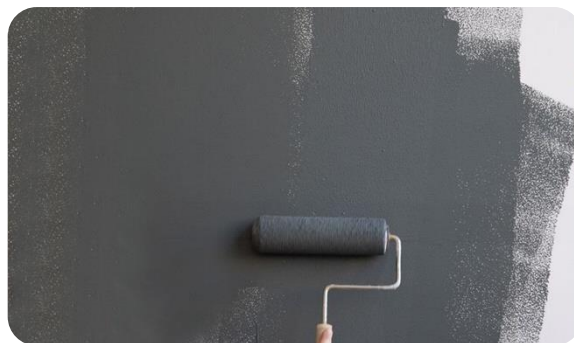

Storage :

Thoughpox C may be storage under air at ambient temperatures for extended periods. Containers should be kept closed to protect Thoughpox C from moisture contaminations.

KEEP THE PACKING TIGHTLY SELED WHEN NOT IN USE.

Shelf life:

Shelf life under appropriate storage condition min 24 months .

Technical information:

Appearance	Liquid clear
Color	Colorless Transparent
Viscosity (25°C Cps)	Approx 12000 - 14000
Equivalent weight	480 - 520
Density (25°C)	1.1