

### Chemical / physical nature:

This product is a solvent-free two-component polyurethane compound to produce a strong adhesive for the production of multi-layer laminates. After combining and completing chemical reactions, this product shows excellent resistance to atmospheric conditions and chemicals.

### Major application:

This two-component system is used for gluing printed laminate layers, metalized laminates, etc..




### Stability:

Under the above conditions according to the technical information

### Storage:

This product should be kept in its original packaging, away from direct sunlight, heat and at a temperature of less than 25 degrees Celsius.

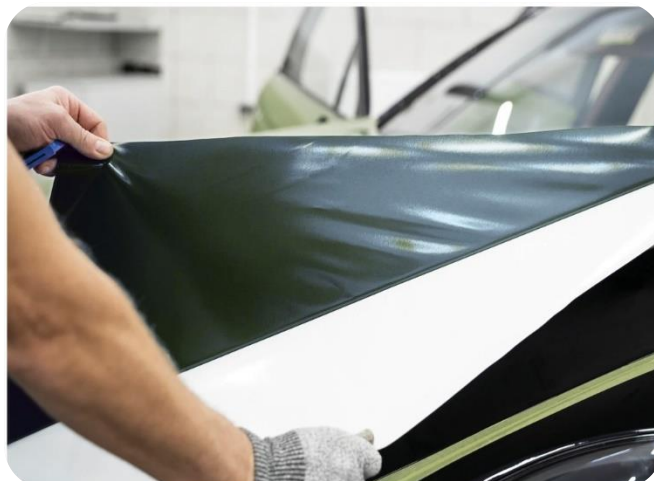

### Technical information:

Specific	PU 200	HA200	Unit
Appearance	Yellow viscous liquid		
Functionality	Oh	NCO	
Solid content	100	100	Percent
Viscosity	1000 - 2000	1500- 3000	Cps
Weight ratio	100	30-35	
Pot life	1 year	4 months	